

**INGENIERIA ELECTRONICA APLICADA A LAS VIBRACIONES**  
José María Mestre No. 26, Col. Miguel Hidalgo 1ª Sección, México, D. F. C. P. 14260  
Tel. +52 55 5606 42 17 Móvil: +52 521 55 2083 3466

[daniel.paredes@ieav.com.mx](mailto:daniel.paredes@ieav.com.mx)

[www.ieav.com.mx](http://www.ieav.com.mx)

# MachineryMate™ handheld vibration meter MAC200



## Key features


- Built-in ISO alarms
- Easily identify bearing problems with BDU reading
- 100 and 800 line FFT spectrum
- Ruggedized IP67 case
- Full color OLED display
- High performance accelerometer with stinger

Meggitt's handheld vibration meter helps find machine faults before they impact operation or cause catastrophic failures. The MAC200 can increase productivity and lower maintenance costs by identifying vibration problems and bearing conditions in early and late stages of failure. The simple, easy to use meter records, analyzes and displays vibration signals and comes with built-in band filters for unbalance, misalignment, and looseness. The low Hertz range allows readings on machinery running as slow as 120 RPM.

The meter assists in condition monitoring for industries including commercial and industrial HVAC, food processing, packing, petrochemical, pulp and paper, power plants and utilities. The MAC200 is a cost effective tool with high level functionality and capability for a comprehensive picture of machinery health.

## Certifications



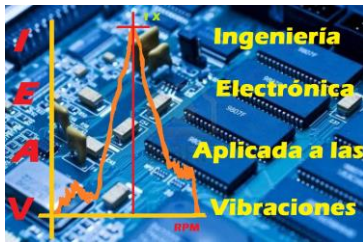

# MachineryMate™ handheld vibration meter MAC200

## Specifications

	English	Metric
<b>Size</b>	7.95" x 2.36 x 1"	20 x 6 x 2.6 cm
<b>Weight, not including magnet</b>	9.8 oz	280 g
<b>Environmental</b>		
<b>Water</b>	IP 67 waterproof	IP 67 waterproof
<b>Operating temperature</b>	+32 to +122° F	0 to +50° C
<b>Storage temperature</b>	-4 to +158° F	-20 to +70° C
<b>Power supply</b>	2x AA batteries	2x AA batteries
<b>Battery life</b>	50 hours normal use	50 hours normal use
<b>Frequency ranges</b>	<b>ISO</b> 120 - 60,000 CPM <b>BDU</b> 60 - 900,000	2 Hz - 1 kHz 1 - 15 kHz
<b>Max frequency resolution</b>	1.25 Hz at 800 lines FFT setting	1.25 Hz at 800 lines FFT setting
<b>Displayed amplitude units</b>		
<b>Acceleration</b>	g	g
<b>Bearing damage</b>	BDU	BDU
<b>Velocity</b>	in/sec	mm/sec
<b>Displayed frequency units</b>	Hz	CPM or RPM
<b>Input range</b>	±50 g	490 m/sec <sup>2</sup>
<b>Dynamic range, 0.01 g resolution</b>	72 dB	72 dB
<b>VA bands</b>	Auto set-up	Auto set-up
<b>Accelerometer connection</b>	internal sensor	internal sensor
<b>Display</b>	OLED full color, high contrast	OLED full color, high contrast
<b>Selectable languages</b>	English (default), Spanish, Portuguese, French, Italian, Turkish, Chinese, Japanese and Korean	

Accessories supplied: MAC002 protective boot with magnets, MAC003 carrying case with inserts. extended stinger

Note: Due to continuous process improvement, specifications are subject to change without notice.

This document is cleared for public release.

## Meggitt Sensing Systems

Our energy product competencies and services

Machinery protection | Condition monitoring | Integrated performance monitoring | Partial discharge monitoring | Sensors for extreme environments  
 Ignition systems | Flame detection and analysis | **Industrial monitoring solutions** | Nuclear products