

## INGENIERIA ELECTRONICA APLICADA A LAS VIBRACIONES


José María Mestre No. 26, Col. Miguel Hidalgo 1ª Sección, México, D. F. C. P. 14260  
 Tel. +52 55 5606 42 17 Móvil: 55 2083 3466  
[daniel.paredes@ieav.com.mx](mailto:daniel.paredes@ieav.com.mx)

[www.ieav.com.mx](http://www.ieav.com.mx)


### VB-8202

### Aceleración y Velocidad-Sistema Métrico

## FEATURES

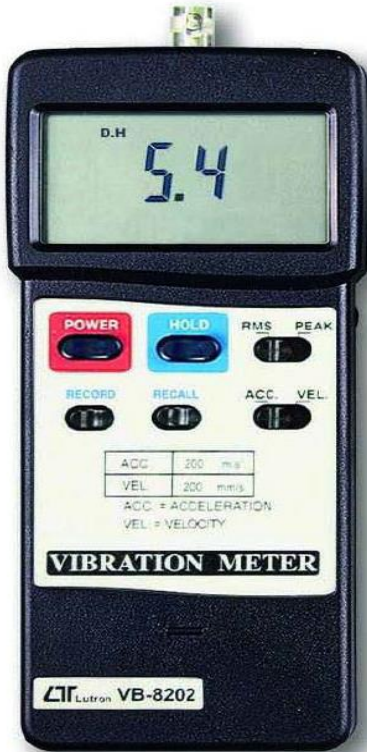

- \* Applications for industrial vibration monitoring : All industrial machinery vibrates. The level of vibration is a useful guide to machine condition. Poor balance, misalignment & looseness of the structure will cause the vibration level increase, it is a sure sign that the maintenance is needed.
- \* Separate vibration probe.
- \* Frequency range 10 Hz - 1 kHz, sensitivity relative meet ISO 2954.
- \* Professional vibration meter supply with vibration sensor, full set.
- \* Velocity measuring range 200 mm/s.
- \* Acceleration range 200 m/s<sup>2</sup>.
- \* RMS & Peak measurement.
- \* Data hold.
- \* Memory function to record max. and min. reading with recall.
- \* Complete set with hard carrying case.



### SPECIFICATIONS

Display	61 mm x 34 mm supper large LCD display. 15 mm ( 0.6" ) digit size.	Data output	RS 232 serial output.
Measurement	Velocity, Acceleration, RMS value, Peak value, Data hold, Max. & Min. value.	Power supply	Alkaline or heavy duty type, DC 9V battery, 006P, MN1604 (PP3) or equivalent.
Range	Velocity : 200 mm/s : 0.5 to 199.9 mm/s Acceleration : 200 m/s : 0.5 to 199.9 m/s <sup>2</sup>	Power consumption	Approx. DC 6 mA.
Frequency range	10 Hz to 1 KHz * Sensitivity relative during the the frequency range meet ISO 2954	Weight	Meter : 230 g/0.50 LB Probe with sensing head : 165 g/0.36 LB
Accuracy	± ( 5 % + 2 d ), 160 Hz, 80 Hz @ 23 ± 5 °C	Dimension	Meter : 180 x 72 x 32 mm ( 7.1 x 2.8 x 1.3 inch ). Vibration probe : Round 36 mm Dia. x 71 mm. Sensing head : 8.9 mm Dia x 42 mm length Cable length : 1.2 meter.
Calibration point	Velocity : 50 mm/s ( 160 Hz ) Acceleration : 50 m/s <sup>2</sup> ( 160 Hz )	Accessories included	Instruction manual..... 1 PC. Cable with plugs..... 1 PC. Vibration probe..... 1 PC. Sensing head..... 1 PC. Magnetic base..... 1 PC. Carrying Case..... 1 PC.
Circuit	Exclusive microcomputer circuit.	Optional accessories	* Software ( Windows version, data record & data acquisition ) ..... SW-U801-WIN * RS232 cable ..... UPCB-01
Data hold	Freeze the desired reading.		
Peak measurement	To measure the peak value. * Peak value = 1.414 RMS value.		
Memory	Maximum & Minimum value.		
Power off	Auto shut off, saves battery life, or manual off by push button.		
Sampling time	Approx. 1 second.		
Operating temperature	0 °C to 50 °C ( 32 °F to 122 °F ).		
Operating humidity	Less than 80% RH.		